


1900 kW Dry Cooler

14-FAN · V-FRAME

Fourteen-fan V-frame dry cooler rejecting over a megawatt of heat.

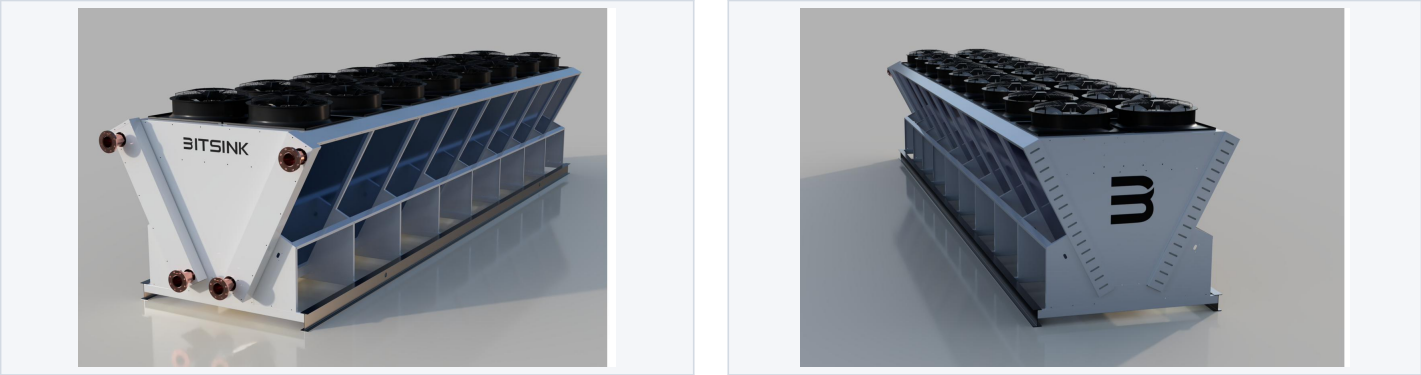

Front-face & rear views

GENERAL	
Rated heat rejection	1900 kW
Configuration	14 fans, V-frame
Orientation	V-frame, top-discharge

CONNECTION & INTERFACE	
Fluid in/out	DN125 ANSI flange (4 total)
Drain plug	2 × DN15 NPT internal-thread plug
Working fluid	Water (closed-loop, inhibited)
Power input	380/480 V – 3 Phase, 50/60 Hz

DIMENSIONS & CONSTRUCTION	
Overall L × W × H	378.4 × 87.5 × 99.1 in
Overall (metric)	9.6 × 2.2 × 2.5 m
Dry weight	3,400 kg (7,496 lb)
Operating weight	4,050 kg (8,929 lb)
Housing material	Sheet metal, powder-coated white

COIL & HEAT EXCHANGER	
Number of coils	2 (independent)
Coil internal volume	650.4 L (171.8 US gal)
Fin / tube material	Aluminum fin / copper tube
Tube spec	5/8 in (Ø15.88 mm) copper
Fin spec	0.12 mm blue hydrophilic Al, corrugated rippled edge, 2.1 mm pitch
Coil geometry	4 rows × 50 tubes × 9,100 mm (per coil)
Header / connection tube	Ø133 copper; DN125 ANSI flange
Casing / side plate	2.0 mm galvanized steel (GI)

FAN DATA

Fan model	Krubo K-EC910-W460-10 (Ø910 mm EC axial)
Number of fans	14
Fan supply	3–460 VAC (380–480 V), 60 Hz
Fan speed	1,055 rpm
Airflow per fan	35,000 m ³ /h (free-air nominal)
Total fan airflow	490,000 m ³ /h (free-air)
Sound pressure per fan	87 dB(A) (LpA @ 1 m)
Power input per fan	2,120 W (2.9 A)
Total fan power input	29,680 W (29.68 kW)
Motor / protection	EC motor · IP54 · insulation Class F
Fan weight (each)	56 kg

THERMAL – RATED CAPACITY

Capacity	1900 kW
Global exchange coefficient	31 W/(m ² ·K)
DTML	10.3 °C

AIR SIDE (design)

Volumetric air flow	362,324.9 m ³ /h
Mass air flow	405,884 kg/h
Face velocity on coil	2.90 m/s
Outlet air temperature	47.0 °C
Air-side pressure drop	107 Pa
Partial exchange coeff (air)	79 W/(m ² ·K)

OPERATING ENVIRONMENT

Ambient temperature	–25 °C to +60 °C
Relative humidity	0 % to 95 % RH
Altitude	≤ 1,000 m

DESIGN CONDITIONS

Working fluid	Water (closed-loop, inhibited)
Inlet fluid temperature	50 °C (122 °F)
Water density	986 kg/m ³ (@ ~55 °C mean)
Water specific heat	4.18 kJ/(kg·K)
Water dynamic viscosity	0.50 mPa·s (@ 55 °C)
Water thermal conductivity	0.648 W/(m·K)
Water Prandtl number	3.2
Inlet air temperature	32 °C (89.6 °F)
Inlet air relative humidity	50.0 %
Inlet air density	1.12 kg/m ³
Altitude / pressure	0 m / 1.01 bar A (sea level)
Fouling factor	0.000000 (m ² ·K)/W (clean design)

FLUID SIDE (design)

Volumetric fluid flow	65.28 m ³ /h
Mass fluid flow	64,428 kg/h
Fluid velocity	1.75 m/s
Outlet fluid temperature	38 °C
Fluid-side pressure drop	181.72 kPa
Partial exchange coeff (fluid)	709 W/(m ² ·K)

OPTIONS & FEATURES

- Integrated electrical box with breakers (standard on turnkey packages).
- Crane lift points for rigging and set.
- Mounting brackets for container-top or side-by-side installation.
- BITSINK health-monitoring suite – fans, pumps, fluid level & temperature.